


EN Straight Shank Oil Tube Chipbreaker Drills
High performance production drilling.

FR Foreuses Brise-copeaux avec Injection d'huile par Tige Droite
Perçage haute performance productivité.

DE Zylinderschaft-Ölzufuhr-Chip-Unterbrecher-Bohrer
Hochleistungs-Produktionsbohren.

ES Taladros de Mango Recto con Alimentación de Aceite para Rompevirutas
Taladrado de producción de elevado rendimiento.

PY Сверла стружколома с прямым хвостовиком и подачей масла
Для высокопроизводительного сверления.

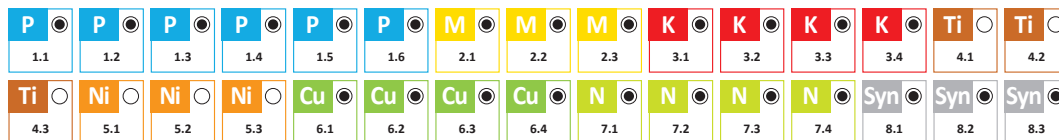


d	d ₁	l ₂	l ₁	Code Código Код
12	12	138	185	10L1200 <small>NEW</small>
12.5	14	158	205	10L1250 <small>NEW</small>
13	14	158	205	10L1300 <small>NEW</small>
13.5	14	158	205	10L1350 <small>NEW</small>
14	14	158	205	10L1400 <small>NEW</small>
14.5	16	180	230	10L1450 <small>NEW</small>
15	16	180	230	10L1500 <small>NEW</small>
15.5	16	180	230	10L1550 <small>NEW</small>
16	16	180	230	10L1600 <small>NEW</small>
16.5	18	200	250	10L1650 <small>NEW</small>
17	18	200	250	10L1700 <small>NEW</small>
17.5	18	200	250	10L1750 <small>NEW</small>
18	18	200	250	10L1800 <small>NEW</small>
18.5	20	228	280	10L1850 <small>NEW</small>
19	20	228	280	10L1900 <small>NEW</small>
19.5	20	228	280	10L1950 <small>NEW</small>
20	20	228	280	10L2000 <small>NEW</small>

 Code
Código
Код

10L

 Propriétés
Propriétés
Eigenschaften
Propiedades
Свойства

 mm **WORKS STD.** **HSS Co5**

TiAIN

 Cutting Data
Données de coupe
Schnittdaten
Datos de corte
Характеристики резания

pg 66

