

Solid Carbide Stub Drills
High production drilling.

Forets extra courts en Carbure Monobloc
Perçage haute productivité.


Vollhartmetall-Spiralbohrer extra kurz
Hochleistungsbohren.

Brocas cortas de carburo sólido
Elevada producción en taladrado.

Цельные твердосплавные сверла короткой серии
Для высокопроизводительного сверления.



OSG GROUP COMPANY

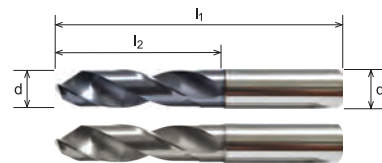

Code
01S

Properties



mm	DIN 6537K	SOLID CARBIDE
----	-----------	---------------

3xD	TYPE N	140°
-----	--------	------

h8	30°	COATED UNCOATED
----	-----	-----------------

Cutting Data

pg 40-41	
----------	--

P								M				K				Ti			Ni			Cu				N				Syn					
1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	2.1	2.2	2.3	2.4	3.1	3.2	3.3	3.4	4.1	4.2	4.3	5.1	5.2	5.3	6.1	6.2	6.3	6.4	7.1	7.2	7.3	7.4	8.1	8.2	8.3			
●	●	●	●	●	●	●	●	○	○	○	○	●	●	●	●	○	○	○							●	●	●	○	○	○	○	○			

d	d ₁	l ₂	l ₁	Drilling Depth	Code	
					Coated	Uncoated
#1	1	6	26	5	01S0100F	01S0100
#1.5	1.5	9	32	7	01S0150F	01S0150
#2	2	12	38	9	01S0200F	01S0200
#2.5	2.5	14	43	11	01S0250F	01S0250
3	6	20	62	14	01S0300F	01S0300
3.3	6	20	62	14	01S0330F	01S0330
3.5	6	20	62	14	01S0350F	01S0350
4	6	24	66	17	01S0400F	01S0400
4.2	6	24	66	17	01S0420F	01S0420
4.5	6	24	66	17	01S0450F	01S0450
5	6	28	66	20	01S0500F	01S0500
5.5	6	28	66	20	01S0550F	01S0550
6	6	28	66	20	01S0600F	01S0600
6.3	8	34	79	24	01S0630F	01S0630
6.5	8	34	79	24	01S0650F	01S0650
6.8	8	34	79	24	01S0680F	01S0680
7	8	34	79	24	01S0700F	01S0700
7.5	8	41	79	29	01S0750F	01S0750
8	8	41	79	29	01S0800F	01S0800
8.5	10	47	89	35	01S0850F	01S0850
9	10	47	89	35	01S0900F	01S0900
9.5	10	47	89	35	01S0950F	01S0950
10	10	47	89	35	01S1000F	01S1000
10.2	12	55	102	40	01S1020F	01S1020
10.5	12	55	102	40	01S1050F	01S1050
11	12	55	102	40	01S1100F	01S1100
11.5	12	55	102	40	01S1150F	01S1150
12	12	55	102	40	01S1200F	01S1200
12.5	14	60	107	43	01S1250F	01S1250
12.7	14	60	107	43	01S1270F	01S1270
13	14	60	107	43	01S1300F	01S1300
13.5	14	60	107	43	01S1350F	01S1350
14	14	60	107	43	01S1400F	01S1400

DIN 6539

